

Torit Bin Vent

Models TBV-2, TBV-4, TBV-6

Cartridge filtration technology that adds economic value and recovers valuable dust.

- Efficient, compact design for applications involving silos, storage bins, or conveyor transfer points.
- Available as plenum-mounted and insertable cabinets to keep the profile low.
- Units are easily installed on bins or silos, eliminating ductwork and reducing installation expenses.
- Standard Ultra-Web® cartridge filters, with nanofiber technology, provide higher filtration efficiency and longer filter life.
- MERV* 13 filtration efficiency rating outperforms the competition's standard filters.
- Choice of filter cartridges provide high filtration efficiency for a wide variety of applications.



TBV-4 with Plenum

Designed for easy filter service and maintenance—no tools required


- Easy filter removal and replacement from clean air side makes it unnecessary to enter the silo or storage container.
- Continuous-duty, on-demand pulse cleaning provides uninterrupted service and keeps filters clean for a long time.




**Ultra-Tek®, Ultra-Web®,
Torit-Tex™, and Fibra-Web®**

Torit Bin Vent

Dimensions and Specifications

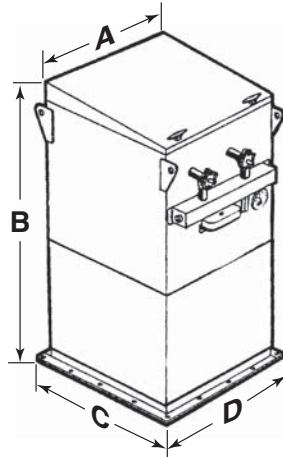

Plenum

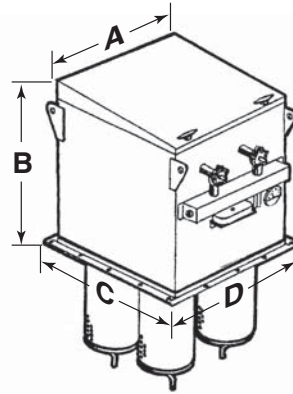

Insertable

Model	Filter Area (ft ²)			No. of Cartridges	No. of Valves	Dimensions (inches)					Shipping Weight (lbs)	
	Ultra-Web	Fibra-Web Ultra-Tek	Torit-Tex			B		C	D	Plenum	Insertable	
						A	Plenum					Insertable
TBV-2	452	220	100	2	2	34.6	53.6	33.1	24.2	37.5	490	419
TBV-4	904	440	200	4	2	34.6	54.6	34.1	35.4	37.5	780	697
TBV-6	1356	660	300	6	3	51.9	54.6	34.1	35.4	54.7	880	775

Standard Features

- Ultra-Web® cartridge
- Magnehelic®** gauge
- NEMA 4 enclosure
- 10-year warranty

Equipment Options

- Insertable or plenum style
- Cartridges
 - Ultra-Web® FR
 - Fibra-Web® & Fibra-Web FR
 - Ultra-Tek®
 - Torit-Tex™
- Weatherhood
- 1, 2, 3, and 5 hp fans
- Dampers
- Chamber silencers
- Photohelic®* gauge
- NEMA 9 enclosure
- Hostile environment coating

* The Minimum Efficiency Reporting Value (MERV) of this filter cartridge has been determined through independent laboratory testing using ASHRAE 52.2 (1999) test standards. The MERV rating was determined at a face velocity of 118 feet per minute and loading up to four inches water gauge. Actual efficiency of any filter cartridge will vary according to the specific application parameters. Dust concentration, airflow, particle characteristics, and pulse cleaning methods all affect filtration efficiency.

** Magnehelic and Photohelic are registered trademarks of Dwyer Instruments, Inc.



Donaldson Company, Inc.
 Industrial Air Filtration
 P.O. Box 1299
 Minneapolis, MN 55440
 Tel 800-365-1331 USA
 Tel 800-343-3639 within Mexico
 dustmktg@mail.donaldson.com
 www.donaldsontorit.com

Significantly improve the performance of your collector with genuine Donaldson Torit replacement filters and parts.

Visit us at www.donaldsontorit.com

Information in this document is subject to change without notice.

© 1995 Donaldson Co., Inc.
 Printed in U.S.A. on recycled paper

Data Sheet Bin Vent (10/06)



Visit us online at DustCollectionPros.com

Our Business is Improving Your Workplace Air Quality.



Since 1995, Environmental Solutions has been helping businesses, like yours, improve their workplace air quality. As an authorized service center for Donaldson Torit, we offer you a one-stop shop for equipment, service, engineering and installation of the industry's leading air pollution control systems.

Whether your company requires the removal of oil mist, welding fumes, machining or wood-working dust, graphite, or correction of any other type of air quality problem; we can expertly engineer and install a quality Donaldson Torit solution to meet your unique needs. No system is too big or too small.

TOLL FREE 1-866-438-7891

 **Environmental**
Solutions

12427 Fire Island Drive
Loves Park, IL 61111
Phone: (847) 370-9304

Environmental Solutions is also your source for discount pricing on genuine Donaldson Torit Replacement Filters!

DONALDSON TORIT SALES | INSTALLATION | REPLACEMENT FILTERS