

Downdraft Bench

Models DB-2000 and DB-3000

Self-contained dust collector bench used in grinding and finishing operations.




DB-3000

- Powerful downward airflow effectively captures dust and fume.
- Even air distribution provides effective dust control over the entire work surface.
- Hinged side-wing panels open to accommodate longer workpieces.
- Built-in fluorescent light illuminates work area.
- Ergonomically designed for operator comfort.
- Fibra-Web® FR filter cartridges featuring nanofiber technology provide high filtration efficiency and long filter life.
- MERV* 14 filtration efficiency rating per ASHRAE 52.2-1999.
- Productivity increases and morale improves by providing a cleaner working environment.
- Helps support OSHA Clean Air Standards.
- Quiet operation.

Downdraft Bench

Dimensions & Specifications

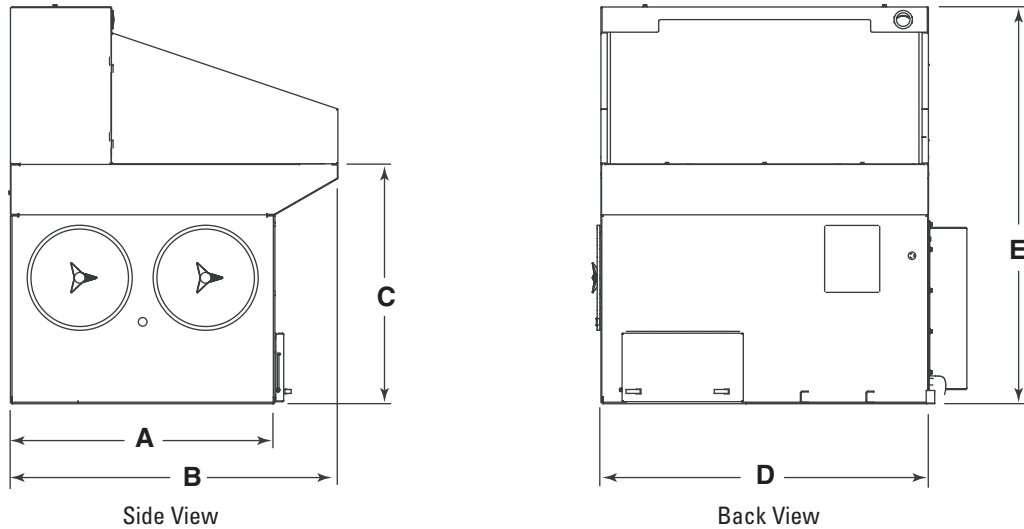

Model	Nominal Airflow** (cfm)	Filter Area (ft ²)	Motor (hp)	Downdraft Velocity (fpm)	Dimensions (inches)					Dust Capacity (ft ³)	Max Load per sq. ft. (lbs)	Shipping Weight (lbs)	Sound Level dB(A)†
					A	B	C	D	E				
DB-2000	2000	240-508	3	200	42.0	52.0	38.0	52.0	63.0	1.4	75	980	68
DB-3000	3000	480-1016	5	200	42.0	52.0	38.0	78.0	63.0	2.8	75	1300	72

Note: Customer must have 90 to 100 psi clean air available. Filter area depends on the type of cartridge used.

Standard Features

- Heavy-duty work surface supports 75 lb/ft²
- Automatic self-cleaning pulse jet system
- Quiet, efficient backward inclined airfoil fan
- Large capacity dust drawers
- Fibra-Web® FR cartridge
- Fluorescent light fixture
- 10-year warranty

Equipment Options

- Prewired controls with after-shift cleaning system
- Scratch-resistant work surfaces
- Variety of Torit-Built® filter cartridges

* The **Minimum Efficiency Reporting Value (MERV)** of this filter cartridge has been determined through independent laboratory testing using ASHRAE 52.2 (1999) test standards. The MERV rating was determined at a face velocity of 118 feet per minute and loading up to four inches water gauge. Actual efficiency of any filter cartridge will vary according to the specific application parameters. Dust concentration, airflow, particle characteristics, and pulse cleaning methods all affect filtration efficiency.

** Based on clean filters.

† Sound level per ANSI S12.34.1988. The actual measured sound level will vary, depending on background noise and room conditions.



Donaldson Company, Inc.
Industrial Air Filtration
P.O. Box 1299
Minneapolis, MN 55440

Tel 800-365-1331(USA)
Tel 800-343-3639 (within Mexico)
dustmktg@mail.donaldson.com
www.donaldson.com

Significantly improve the performance of your collector with genuine Donaldson Torit replacement filters and parts.

Visit us at www.donaldsondynamic.com



Information in this document is subject to change without notice.

© 2000 Donaldson Co., Inc.
Printed in U.S.A. on recycled paper

Data Sheet DB (01/07)

Visit us online at DustCollectionPros.com

Our Business is Improving Your Workplace Air Quality.



Since 1995, Environmental Solutions has been helping businesses, like yours, improve their workplace air quality. As an authorized service center for Donaldson Torit, we offer you a one-stop shop for equipment, service, engineering and installation of the industry's leading air pollution control systems.

Whether your company requires the removal of oil mist, welding fumes, machining or wood-working dust, graphite, or correction of any other type of air quality problem; we can expertly engineer and install a quality Donaldson Torit solution to meet your unique needs. No system is too big or too small.

TOLL FREE 1-866-438-7891

 **Environmental**
Solutions

12427 Fire Island Drive
Loves Park, IL 61111
Phone: (847) 370-9304

Environmental Solutions is also your source for discount pricing on genuine Donaldson Torit Replacement Filters!

DONALDSON TORIT SALES | INSTALLATION | REPLACEMENT FILTERS