Cabinet Dust Collector

Model Cabinet 90

Reliable and economical solutions to in-plant dust and smoke control problems.

- Efficient, compact design handles a wide range of dust applications from 1200 to 2000 cfm.
- High collection efficiency of 99.9%+ by weight allows recirculation of heated or air-conditioned plant air.
- Quick access to dust drawers and dust pails provides easy and safe maintenance.
- Manually-operated filter shaker makes filter cleaning easy.
- Four filter media and three construction choices provide a variety of options to customize the unit for your specific application.
- Inlet locations on top and three sides create installation flexibility.




Cabinet 90 (door not shown)


Good choice for low-airflow, light-loading applications that do not require continuous airflow.

- Grinding
- Buffing and polishing
- Machining
- Metalworking

- Packaging
- Abrasive blasting
- Dental labs
- Textiles

Dimensions & Specifications

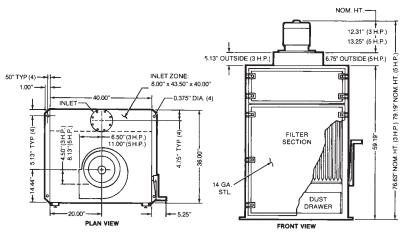



	Nominal	Filter	Blower				External Static	Pressure Drop	Shipping Weight	Shipping Weight
Model	Airflow*	Area	Motor	Inl	et	Velocity	Pressure	Clean Filter	Dust Drawer	Hopper
	(cfm/inlet)	(ft²)	(hp)	(qty)	(in)	(fpm)	("wg)	("wg)	(lbs)	(lbs)
90	1535	250	3	1	7	5734	4.5	0.65	650	800
	1432	250	3	1	7	5343	5.5	0.56	650	800
	1215	250	3	1	7	4531	6.5	0.44	650	800
	1425	250	3	1	6	7275	5.4	0.58	650	800
	1203	250	3	1	6	6135	6.4	0.45	650	800
	895	250	3	1	6	4566	7.1	0.30	650	800
	793	250	3	2	5	5831	3.6	0.66	650	800
	751	250	3	2	5	5521	4.8	0.62	650	800
	649	250	3	2	5	4773	6.1	0.50	650	800
	2000	250	5	1	8	5700	5.5	2.05	675	825
	1800	250	5	1	8	5190	6.3	1.80	675	825
	1600	250	5	1	8	4520	7.5	1.45	675	825

^{*} Based on clean filters.

Standard Features

- Heavy-gauge, fully-welded cabinet
- Galvanized dust drawer
- Dynamically balanced steel fan wheel
- 208/230/460/60/3 voltages
- Blue, indoor, industrialgrade texturized enamel finish
- TEFC blower motor
- 10-year warranty

Equipment Options

- Automatic shaker
- Inlet collar kits
- Casters for portability
- Explosion vent

- Suction-tube assembly
- 55-gallon drum pack
- Slide gate pack
- Weather-protective paint
- Chamber, attenuator, or stack silencer
- Magnehelic®† gauge
- 115/230/60/1; 380/50/3; 575/60/3 voltage

† Magnehelic is a registered trademark of Dwyer Instruments, Inc.



Donaldson.

Donaldson Company, Inc. Industrial Air Filtration P.O. Box 1299 Minneapolis, MN 55440 Tel 800-365-1331(USA) Tel 800-343-3639 (within Mexico) dustmktg@mail.donaldson.com www.donaldsontorit.com Significantly improve the performance of your collector with genuine Donaldson Torit replacement filters and parts.

Visit us at www.donaldsondynamic.com



Information in this document is subject to change without notice.

© 1990 Donaldson Co., Inc. Printed in U.S.A. on recycled paper

Data Sheet Cab 90 (09/05)

Visit us online at DustCollectionPros.com

Our Business is Improving Your Workplace Air Quality.



ince 1995, Environmental Solutions has been helping businesses, like yours, improve their workplace air quality. As an authorized service center for Donaldson Torit, we offer you a one-stop shop for equipment, service, engineering and installation of the industry's leading air pollution control systems.

Whether your company requires the removal of oil mist, welding fumes, machining or woodworking dust, graphite, or correction of any other type of air quality problem; we can expertly engineer and install a quality Donaldson Torit solution to meet your unique needs. No system is too big or too small.

TOLL FREE 1-866-438-7891



12427 Fire Island Drive Loves Park, IL 61111 Phone: (847) 370-9304

Environmental Solutions is also your source for discount pricing on genuine Donaldson Torit Replacement Filters!